EVO3® LINESMAN MICRO PEAK - WHEEL RATCHET - NON-VENTED

TECHNICAL SPECIFICATION

HEAD PROTECTION

SHELL: UV Stabilised High Density Polyethylene (HDPE)

PRODUCT CODE: AJG240-00_-_00

EVO3® IS A TRUE EVOLUTION OF THE LONG ESTABLISHED MK2® & MK3® HELMETS

INSTRUCTIONS FOR USE

Fit helmet on head and fasten strap to ensure fit

For adequate protection this helmet must be worn with peak facing forward

Ensure the helmet is adjusted to the size of the user's head

CHAMLON™ SWEATBAND:

Egyptian cotton core with porous PU coating for maximum sweat absorption. PH neutral, dermatologically tested



WEBBING HARNESS: HDPE Strap & Webbing Clips with Polyester Webbing Straps



WHEEL RATCHET:

The Revolution® Wheel Ratchet RE is the new easy to use wheel ratchet adjustment system to create a firm comfort fit with added security







CLEANING & MAINTENANCE

The unit may be cleaned with soap and warm water and dried with a soft cloth

The helmet should not be cleaned with chemical or abrasive

The helmet should be stored out of direct sunlight

The helmet should be stored away from chemicals and extremes of temperature

CONFORMITY

Conforms to EN397, EN50365 & ANSIZ89

EN 50365 for Helmets for use in low voltage installations

EC Certificate Number 0279, issued by BSi Product Certification

Meets the retro reflective performance requirements of EN12899 when fitted with CR2 Reflective Kit

Meets optional Molten Metal Splash performance

Meets optional Electrical Insulation requirements

Available vented or unvented. Available with mid or micro peak

Company personalisation available by printing

















EVO3® LINESMAN MICRO PEAK - WHEEL RATCHET - NON-VENTED

TECHNICAL SPECIFICATION

HEAD PROTECTION


PRODUCT CODE: AJG240-00_-_00

EVO3® IS A TRUE EVOLUTION OF THE LONG ESTABLISHED MK2® & MK3® HELMETS

DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 3.8kg (Approx.)

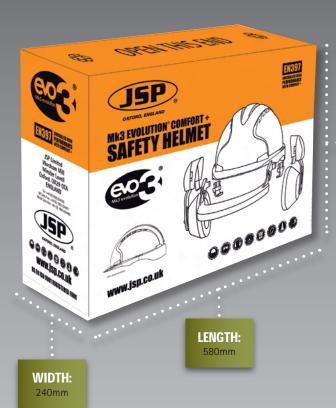

HEIGHT: 450mm

DIMENSIONS OF HELMET

Size: 530 - 640mm

Weight: 375g (Approx.)



HELMET COLOURS

Insert the following two digit number in place of the dashes in the product code of your desired helmet



LIMITATIONS OF USE

HELMET FEATURES

Impact Resistance

Electrial Insulation

Molten Metal (MM)

Universal Accesories

Integrated Eyewear

Reflective CR2 option

-30°C

HDPE

HDPF

Textile

Micro Peak

Wheel Ratchet

JSP 3D

6 pts

4 pts

MOQ Logo

Individual Name

Recyclable

UV Stabilised

Yes 50 Joules

EN397 440V

Yes

PERFORMANCE

TEMPERATURE

RESISTANCE

SHELL

MATERIAL

HARNESS

MATERIALS

OPTIONS

HARNESS

SYSTEM OPTIONS

CHINSTRAP

Protection will only be offered if the helmet is fitted correctly

Any helmet subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer

The harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

















